


NON-CONTROLLED COPY INFORMATION SUBJECT TO CHANGE WITHOUT NOTICE COPY WILL NOT BE UPDATED	COPY ISSUED BY _____ COPY ISSUED ON _____
---	--

△ A

PIPE SIZE	FACE OF FLANGE DIMENSION	OUTSIDE DIAMETER	BOLT CIRCLE	NO. OF BOLTS	NO. OF GUSSETS	THICKNESS OF GUSSETS
8"	9 1/2"	13 1/2"	11 3/4"	12	4	1/2"
10"	10 1/2"	16"	14 1/4"	12	4	1/2"
12"	10 1/2"	19"	17"	12	4	1/2"

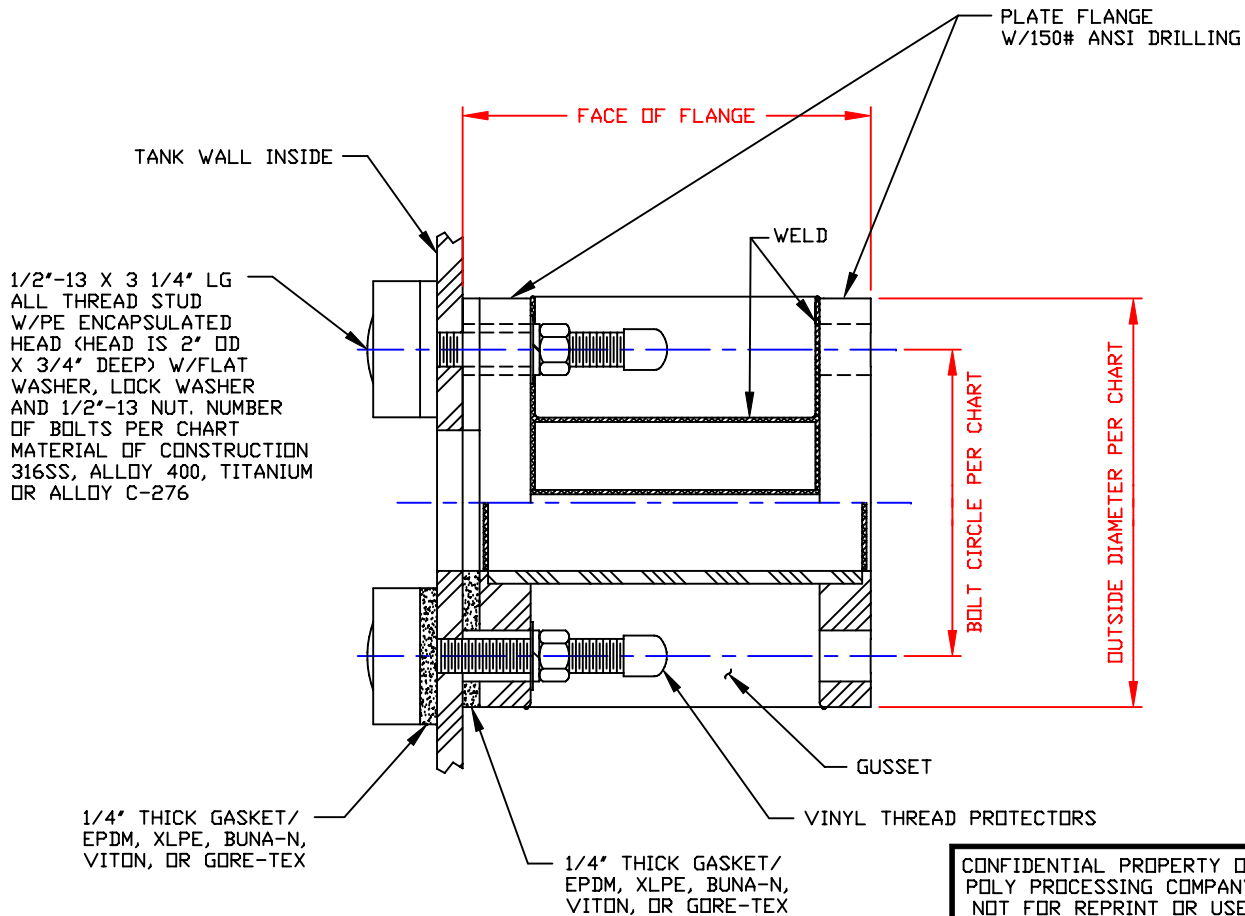

NOTES

1. THIS IS A COMPUTER GENERATED DRAWING. DO NOT REVISE BY HAND.
2. BOLTED SPOOL FITTINGS MAY BE USED ON THE TANK SIDE WALL, ON THE BOTTOM, OR ON THE CENTER OF THE DOME. BOLTED SPOOL FITTINGS MAY ALSO BE USED ELSEWHERE ON THE DOME IF IT IS NOT NECESSARY THAT THE FITTING WILL FOLLOW THE CURVE OF THE DOME.

REV "A" REVISED # OF BOLTS BY:BT 2/21/06 CK:MBW			
DWG TITLE		8" THRU 12" BOLTED SPOOL FITTING WITH GUSSETS (PP)	
SCALE:	6"=1'-0"		DR: J. BRANTLEY
DATE:	3/1/01		CK: MB WILKERSON
		SHEET	COMPUTER FILE
		1 OF 1	BLTDSP2 A

CONFIDENTIAL PROPERTY OF POLY PROCESSING COMPANY NOT FOR REPRINT OR USE WITHOUT PERMISSION